


Thick Film Resistor Networks, Dual-In-Line, Wide Body, Small Outline, Molded DIP, Surface Mount



FEATURES

- TTL/ECL translator and signal terminator schematics available
- 0.110" (2.79) maximum seated height
- Rugged, molded case construction
- 0.050" (1.27) lead spacing
- Reduces total assembly costs
- Compatible with automatic surface mounting equipment
- Uniform performance characteristics
- Meets EIA PDP 100, SOGN-0003 outline dimensions
- Available in tube pack or tape and reel pack
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912


RoHS*
Available

Note

* This datasheet provides information about parts that are RoHS-compliant and/or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information/tables in this datasheet for details.

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	CIRCUIT SCHEMATIC	POWER RATING ELEMENT $P_{70^{\circ}\text{C}}$ W	POWER RATING PACKAGE $P_{70^{\circ}\text{C}}$ W	TOLERANCE $\pm \%$	RESISTANCE VALUES Ω	MAXIMUM WORKING VOLTAGE ⁽¹⁾ V_{DC}	TEMPERATURE COEFFICIENT $\pm \text{ppm}/^{\circ}\text{C}$
SOGC16	45	0.1	1.6	2	180, 270, 820	50	100
	46	0.1	1.6	2	330, 150, 330	50	100
SOGC20	45	0.1	2.0	2	180, 270, 820	50	100
	46	0.1	2.0	2	330, 150, 330	50	100

Note

⁽¹⁾ Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less.

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	SOGC16	SOGC20
Package power rating (maximum at +70 °C)	W	1.6	2.0
TCR tracking (-55 °C to +125 °C)	ppm/°C	± 50	
Voltage coefficient of resistance	ppm/V	< 50 typical	
Maximum operating voltage	V_{DC}	50	
Operating temperature range	°C	-55 to +125	
Storage temperature range	°C	-55 to +150	

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: SOGC1646DC (preferred part numbering format)

S O G C 1 6 4 6 D C

GLOBAL MODEL	PIN COUNT	SCHEMATIC	PACKAGING	SPECIAL
SOGC	16 20	45 = TTL/ECL translator 46 = SIGNAL terminator	EJ = Lead (Pb)-free, tube EA = Lead (Pb)-free, tape and reel DC = Tin/lead, tube RZ = Tin/lead, tape and reel	Blank = Standard (Dash number) (Up to 3 digits) From 1 to 999 as applicable

Historical Part Number Example: SOGC1646 (will continue to be accepted)

SOGC	16	46	D02
HISTORICAL MODEL	PIN COUNT	SCHEMATIC	PACKAGING


Note

- For additional information on packaging, refer to the Surface Mount Network Packaging document (www.vishay.com/doc?31540).

MECHANICAL SPECIFICATIONS

Marking	Model number, schematic number, value, tolerance, pin 1 indicator, date code
Marking resistance to solvents	Permanency testing per MIL-STD-202, method 215
Maximum solder reflow temperature	+255 °C
Solderability	Per MIL-STD-202, method 208E
Terminals	Copper alloy. Solder dipped terminal
Body	Molded epoxy


DIMENSIONS in inches (millimeters)

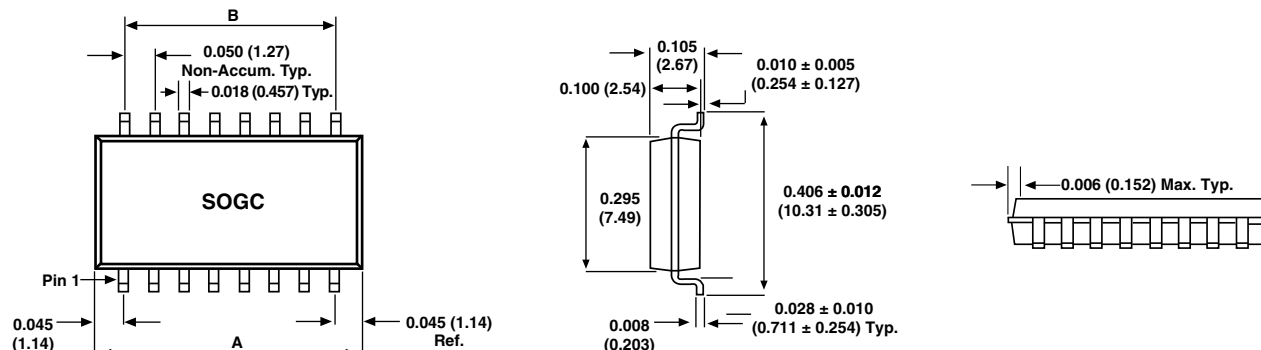

GLOBAL MODEL	A	B
SOGC16	0.440 (11.18)	0.350 (8.89)
SOGC20	0.540 (13.72)	0.450 (11.43)

CIRCUIT APPLICATIONS


45 Schematic

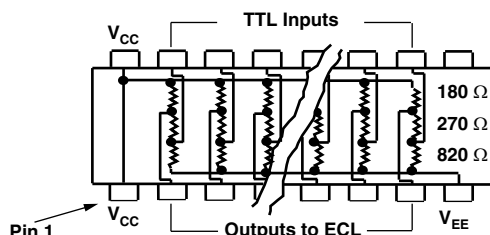

TTL to ECL translator


The SOGCxx45 network consists of resistors of 3 different values, internally divided into 6 or 8 identical three (3) resistor sections for TTL to ECL translation.

46 Schematic

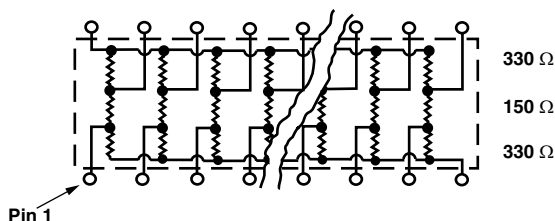

SCSI-BUS signal terminator

The SOGCxx46 network consists of resistors of 2 different values, internally divided into 7 or 9 identical three (3) resistor sections for SCSI-BUS terminator applications.

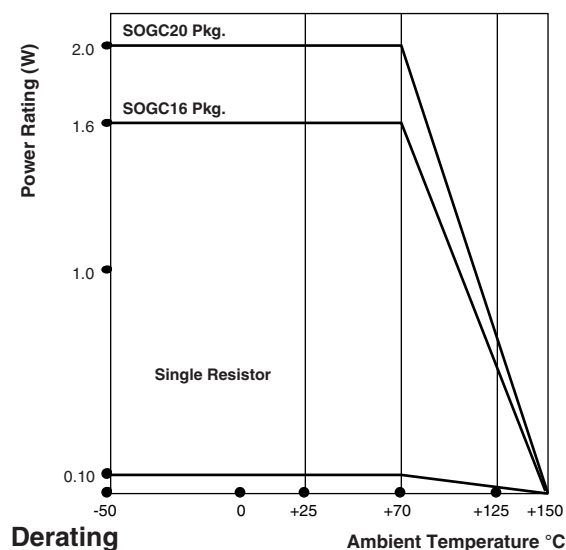

PERFORMANCE

TEST	MAX. ΔR (TYPICAL TEST LOTS)
Power conditioning	$\pm 0.50\% \Delta R$
Thermal shock	$\pm 0.50\% \Delta R$
Short time overload	$\pm 0.25\% \Delta R$
Low temperature operation	$\pm 0.25\% \Delta R$
Moisture resistance	$\pm 0.50\% \Delta R$
Resistance to soldering heat	$\pm 0.25\% \Delta R$
Shock	$\pm 0.25\% \Delta R$
Vibration	$\pm 0.25\% \Delta R$
Load life	$\pm 0.50\% \Delta R$
Terminal strength	$\pm 0.25\% \Delta R$
Insulation resistance	10 000 M Ω (minimum)
Dielectric withstanding voltage	No evidence of arcing or damage (200 V _{RMS} for 1 min)

Note

- Test methods per MIL-STD-202.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.